










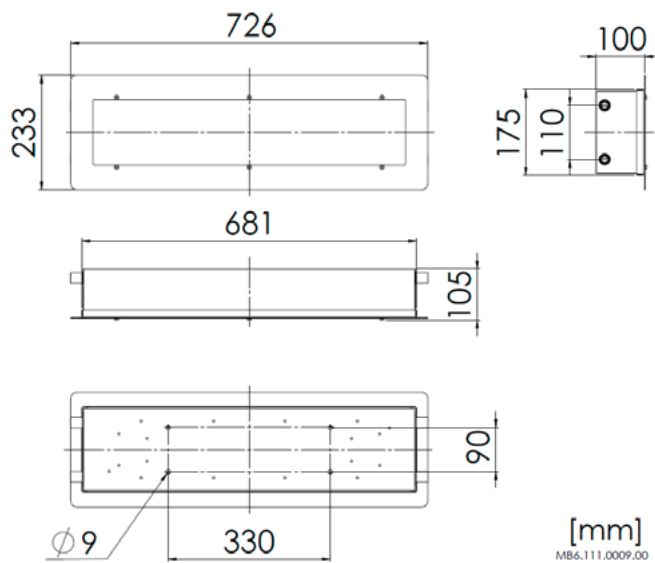

RECESSED CEILING LUMINAIRE FOR ACCOMMODATION AREAS, BRIDGE, CONTROL ROOMS, OFFICES AND HOSPITAL



STANDARD CONFIGURATION

Housing	Galvanized steel, powder coated white (RAL9010)
Cover	Polycarbonate, ice crystal structure
Mounting	4 holes, Ø 9 mm
Cable entry	Max. 4 cable glands
Protection class	IP56
Light source	Linear LP LED modules
Wattage	Max. 19W
Luminous flux	1,600 lm
CCT (color)	3,000 K
CRI	≥ 80

AVAILABLE FEATURES

	EMI proof
	Shock proof
	Vibration resistant
	NVG compatible
	Adaptation light
	Multi-circuit
	Various optics
	Controllable

YOUR REQUIREMENTS

Please contact us for different configurations or further information on this luminaire type. Based on your requirements, the final part number will be provided.