


RECESSED DOWNLIGHT

DL63





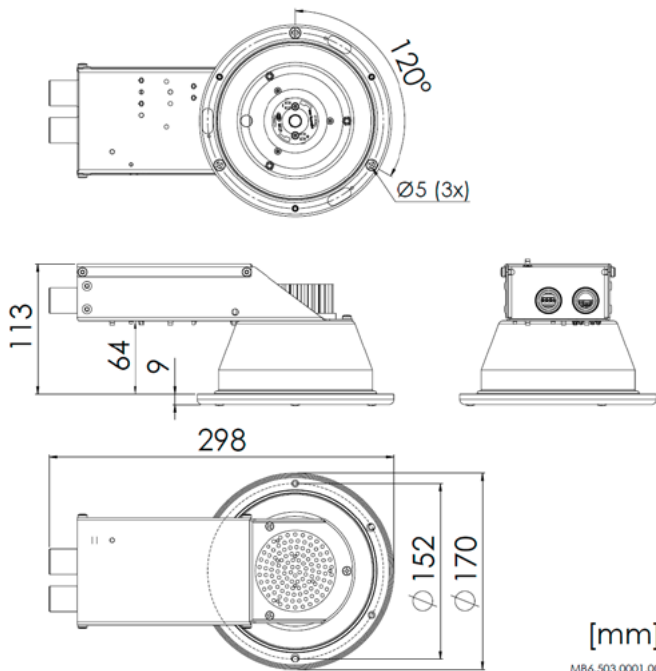




RECESSED DOWNLIGHT WITH CHANGEABLE COVER RING FOR CABINS, ACCOMMODATION AREAS, BRIDGE AND CONTROL ROOMS



STANDARD CONFIGURATION

Housing	Galvanized steel, powder coated white (RAL9016)
Cover	Colored or chrome ring with opal lens
Mounting	3 holes, Ø 5 mm
Cable entry	2 cable glands
Protection class	IP20 / IP55
Light source	LED array
Luminous flux	1,000 lm
CCT (color)	3,000 K
CRI	≥ 80

AVAILABLE FEATURES

	EMI proof
	Shock proof
	Vibration resistant
	Adaptation light
	Multi-circuit
	Various optics
	Controllable

YOUR REQUIREMENTS

Please contact us for different configurations or further information on this luminaire type. Based on your requirements, the final part number will be provided.

Technical modification reserved without prior notice.



LIGHTPARTNER LICHTSYSTEME GMBH & CO. KG
AM MOHRENSHOF 7 · 28277 BREMEN · GERMANY
+49 (0)421 - 87 195 - 0 · SALES@LIGHTPARTNER.DE

LIGHTPARTNER NAVY