




BERTH LIGHT WITH SWITCH FOR CABINS



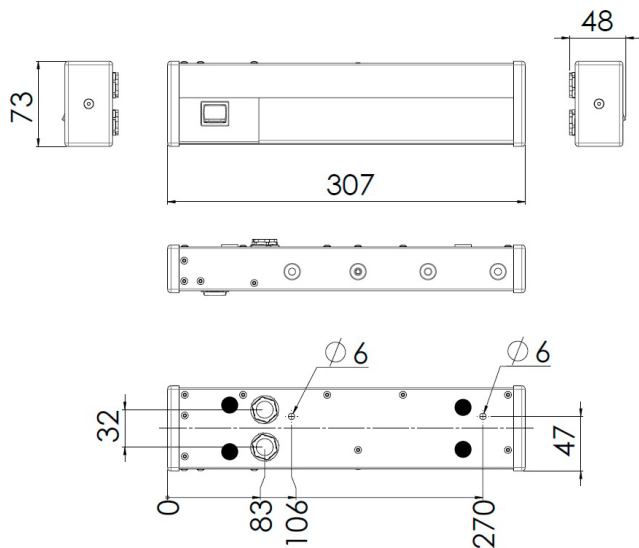


[mm]

MB6.117.0004.00

STANDARD CONFIGURATION

Housing/Cover	Galvanized steel, powder coated white (RAL9016), with opal diffuser
Mounting	2 holes, Ø 5.5 mm
Cable entry	2 EMC grommets
Protection class	IP30
Light source	Linear LP LED module
Wattage	Max. 7 W
Luminous flux	450 lm
CCT (color)	3,000 K
CRI	≥ 80

AVAILABLE FEATURES

	EMI proof
	Shock proof
	Vibration resistant

YOUR REQUIREMENTS

Please contact us for different configurations or further information on this luminaire type. Based on your requirements, the final part number will be provided.